

6 5 4 3 2 1

E  
D  
C  
B  
A



**5B PARTIAL EXISTING WEST ELEVATION**  
3/16" = 1'-0"

**4B PARTIAL EXISTING WEST ELEVATION**  
3/16" = 1'-0"

**2B EXISTING WEST ELEVATION**  
3/16" = 1'-0"

**2A EXISTING NORTH ELEVATION**  
3/16" = 1'-0"

**General Demolition Notes**

- A. Contractor shall field-verify all existing conditions, dimensions, and arrangements.
- B. Contractor is responsible for protection of all existing surfaces, materials, and components to remain or be relocated. Damage to these resulting from performance of Work shall be repaired by Contractor to satisfaction of Owner and Architect at no additional expense to Owner.
- C. Contractor shall provide temporary dust protection as required to prevent construction debris and dust from migrating out of Project Area. Owner/Architect shall confirm all dust prevention measures/locations and shall determine changes to these measures.
- D. All existing equipment and fixtures shall remain property of Owner. All reusable items salvaged during demolition operations shall be retained for Owner's inspection. Only items so inspected and rejected by Owner shall be disposed. All other such items shall be turned over to Owner for disposition.
- E. All existing surfaces located adjacent to, or exposed by demolition work and scheduled to receive new construction shall be patched and repaired as required to cleanly receive new work.
- F. All existing surfaces located adjacent to, or exposed by demolition work and scheduled to remain exposed after completion of new construction shall be repaired and patched as required to receive new finishes.
- G. Owner will be responsible for removal/rearrangement of all existing loose furnishings during construction, unless noted otherwise.
- H. Refer to Mech./Elec. Drawings for additional patching and preparation work related to M.E.P. demolition items.
- I. Existing sleeves, holes, and other penetrations or new damage of existing building structure above grade exposed by demolition and removal of piping, appliances, equipment shall be patched and repaired as part of the Work. Maintain fire ratings of all and adjacent construction affected.
- J. Cap all piping to remain or abandoned in accordance with requirements of authority having jurisdiction and in accordance with all local and state plumbing and health codes. Utilize only pre-manufactured and approved fittings to cap existing piping.
- K. Coordinate all demolition with Project sequencing as directed by General Contractor or Construction Manager. Specific instances are noted but work is not limited to these instances. Owner has right of first refusal.
- L. Remove all exterior holiday light strips and fix holes when needed.
- M. Remove all exterior window screens with associated hardware and return to owner.
- N. At all existing exterior wood, re-nail existing wood where loose. Re-position wood that has shifted from its original position and re-secure. Pull exterior wood light where gapped from its adjacent piece.
- O. Remove all hornets/bee nests from the exterior.
- P. Strip and evaluate all facias to determined condition of wood. Inform architect of wood that may need to be replaced where its replacement has been noted in the drawings.
- Q. Remove leaves from entire perimeter of building.
- R. Remove window treatments and associated hardware in areas of work. Salvage and reinstall.

**DEMOLITION BUILDING ELEVATION NOTES**

#	NOTE
1	REMOVE EXISTING STAIR TREADS AND REPAIR SIDING BOARD UNDER THRESHOLD. RETAIN STAIR TREADS FOR REINSTALLATION. REFER TO 1A/AD212.3 FOR IMAGE.
2	REMOVE POPPED TRIANGLE AND RENEW. REFER TO 2A/AD212.3 FOR IMAGE.
3	REMOVE ROTTED PLANKS AND REPLACE WITH PLANKS SIMILAR TO NOTE 2. REFER TO 3A/AD212.3 FOR IMAGE.
4	REMOVE GUTTERS AND DOWNSPOUTS IN THEIR ENTIRETY INCLUDING ALL ATTACHMENTS. REPLACE GUTTERS TO MATCH THE LOCATION, PROFILE AND DIMENSIONS OF THE EXISTING GUTTERS. REFER TO 4A/AD212.3 FOR TYPICAL IMAGE.
5	REMOVE EXISTING HARDWARE FROM REMOVED SCREEN DOOR. PATCH AND FILL HOLES. REFER TO 5A/AD212.3 FOR IMAGE.
6	REMOVE WOOD BATTEN TYPICAL OF INSTANCE OF LOOSE BATTEN. RETAIN BATTEN FOR REINSTALLATION. REFER TO 6A/AD212.3 FOR IMAGE.
7	REMOVE WOOD DETAIL. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 7A/AD212.3 FOR IMAGE.
8	REMOVE EXISTING RAILING IN ITS ENTIRETY INCLUDING BUT NOT LIMITED TO RAILS, POSTS AND BRACKETS.
9	NEATLY CUT OFF THE ROTTED ENDS OF THE BATTEN BOARD AND SIDING. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 9A/AD212.3 FOR IMAGE.
10	NEATLY CUT OFF THE ROTTED ENDS OF THE BATTEN BOARD AND SIDING. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 10A/AD212.3 FOR IMAGE.
11	REMOVE EXISTING SPRAY FOAM. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 11A/AD212.3 FOR IMAGE.
12	REMOVE SATELLITE DISH AND ALL RELATED WIRES AND HARDWARE.
13	REMOVE BOARD AND BATTEN. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 13A/AD212.3 FOR IMAGE.
14	NEATLY CUT OFF THE ROTTED ENDS OF THE BATTEN BOARD AND SIDING. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 14A/AD212.3 FOR IMAGE.
16	REMOVE FASCIA. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 16A/AD212.3 FOR IMAGE.
17	REMOVE ROTTEN BRACKET. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 17A/AD212.3 FOR IMAGE.
18	REMOVE BATTEN BOARD. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 18A/AD212.3 FOR IMAGE.
19	CLEAN OUT WINDOW WELL AND REMOVE TOP WYTHE OF BRICK. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 19A/AD212.3 FOR IMAGE.
20	REMOVE PLYWOOD. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 20A/AD212.3 FOR IMAGE.
21	REMOVE PLYWOOD AND GLASS. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 21A/AD212.3 FOR IMAGE.
22	REMOVE INNER BOARD AND CLEAN OUT BEFORE REFASTENING. REFER TO 22A/AD212.3 FOR IMAGE OF CONDITION.
23	REMOVE BATTEN BOARD. PATCH AND REPAIR ALL EXISTING SURFACES AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 23A/AD212.3 FOR IMAGE.
24	REMOVE BOTTOM RAIL. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 24A/AD212.3 FOR IMAGE.
25	REMOVE EXISTING GLAZING FROM WINDOWS. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. TYPICAL. REFER TO 25A/AD212.3 FOR IMAGE.
26	REMOVE WOOD DETAILS. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 26A/AD212.3 FOR IMAGE.
27	REMOVE ROTTEN BRACKET. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 27A/AD212.3 FOR IMAGE.
28	REMOVE FLASHING. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 28A/AD212.3 FOR IMAGE.
29	REMOVE WOOD STAIRS AND LANDING IN THEIR ENTIRETY. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH.
30	REMOVE LOUVER. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 30A/AD212.3 FOR IMAGE.

**SCHMIDT ASSOCIATES**  
schmidt-arch.com • 317.263.6226  
415 Massachusetts Ave., Indianapolis, IN 46204  
731 Brent St., #203, Louisville, KY 40204

Project No. 2021-036.GAH  
Project Date 01.08.2026  
Produced TM

*Sarah K. Hempstead*

These Drawings and Specifications, and all copies thereof are and shall remain the property and copyright of the Architect. They shall be used only with respect to this Project and are not to be used on any other Project or Work without prior written permission from the Architect.

#	Revision	Date

3705 IN SR 16  
Brook, IN 47922

**NEWTON COUNTY BOARD OF COMMISSIONERS**

**HAZELDEN ESTATE RESTORATION - HOUSE RESTORATION - BID PACKAGE 3**

**NORTH AND WEST DEMOLITION ELEVATIONS**  
**AD210.3**

DATE: 01/08/2026 10:00 AM  
DRAWING: DEMOLITION ELEVATIONS  
PROJECT: HAZELDEN ESTATE RESTORATION - HOUSE RESTORATION - BID PACKAGE 3  
DRAWING NO: AD210.3  
SCALE: 3/16" = 1'-0"

6

5

4

3

2

1

E

D

C

B


A

### General Demolition Notes

- A. Contractor shall field-verify all existing conditions, dimensions, and arrangements.
- B. Contractor is responsible for protection of all existing surfaces, materials, and components to remain or be relocated. Damage to these resulting from performance of Work shall be repaired by Contractor to satisfaction of Owner and Architect at no additional expense to Owner.
- C. Contractor shall provide temporary dust protection as required to prevent construction debris and dust from migrating out of Project Area. Owner/Architect shall confirm all dust prevention measures/locations and shall determine changes to these measures.
- D. All existing equipment and fixtures shall remain property of Owner. All reusable items salvaged during demolition operations shall be retained for Owner's inspection. Only items so inspected and rejected by Owner shall be disposed. All other such items shall be turned over to Owner for disposition.
- E. All existing surfaces located adjacent to, or exposed by demolition work and scheduled to receive new construction shall be patched and repaired as required to cleanly receive new work.
- F. All existing surfaces located adjacent to, or exposed by demolition work and scheduled to remain exposed after completion of new construction shall be repaired and patched as required to receive new finishes.
- G. Owner will be responsible for removal/rearrangement of all existing loose furnishings during construction, unless noted otherwise.
- H. Refer to Mech/Elec. Drawings for additional patching and preparation work related to M.E.P. demolition items.
- I. Existing sleeves, holes, and other penetrations or new damage of existing building structure above grade exposed by demolition and removal of piping, appliances, equipment shall be patched and repaired as part of the Work. Maintain fire ratings of all and adjacent construction affected.
- J. Cap all piping to remain or abandoned in accordance with requirements of authority having jurisdiction and in accordance with all local and state plumbing and health codes. Utilize only pre-manufactured and approved fittings to cap existing piping.
- K. Coordinate all demolition with Project sequencing as directed by General Contractor or Construction Manager. Specific instances are noted but work is not limited to these instances. Owner has right of first refusal.
- L. Remove all exterior holiday light strips and fix holes when needed.
- M. Remove all exterior window screens with associated hardware and return to owner.
- N. At all existing exterior wood, re-nail existing wood where loose. Re-position wood that has shifted from its original position and re-secure. Pull exterior wood tight where gapped from its adjacent piece.
- O. Remove all hornets/bee nests from the exterior.
- P. Strip and evaluate all facias to determined condition of wood. Inform architect of wood that may need to be replaced where its replacement has been noted in the drawings.
- Q. Remove leaves from entire perimeter of building.
- R. Remove window treatments and associated hardware in areas of work. Salvage and reinstall.



Project No. 2021-036.GAH  
 Project Date 01.08.2026  
 Produced MEW.TM

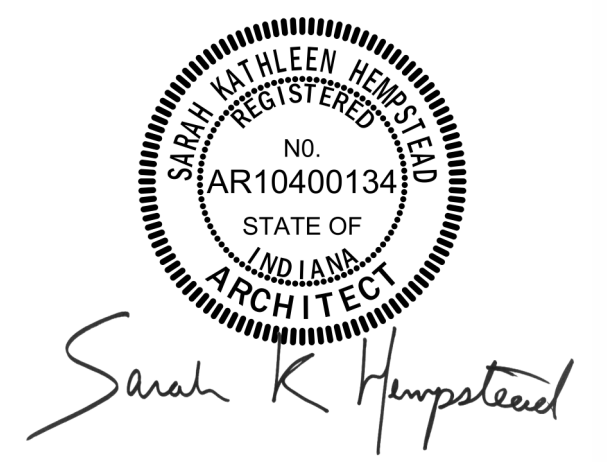


These Drawings and Specifications, and all copies thereof are and shall remain the property and copyright of the Architect. They shall be used only with respect to this Project and are not to be used on any other Project or Work without prior written permission from the Architect.

#	Revision	Date

### DEMOLITION BUILDING ELEVATION NOTES


#	NOTE
1	REMOVE EXISTING STAIR TREADS AND REPAIR SIDING BOARD UNDER THRESHOLD. RETAIN STAIR TREADS FOR REINSTALLATION. REFER TO 1A/AD212.3 FOR IMAGE.
2	REMOVE POPPED TRIANGLE AND RENAIL. REFER TO 2A/AD212.3 FOR IMAGE.
3	REMOVE ROTTED PLANKS AND REPLACE WITH PLANKS SIMILAR TO NOTE 2. REFER TO 3A/AD212.3 FOR IMAGE.
4	REMOVE GUTTERS AND DOWNSPOUTS IN THEIR ENTIRETY INCLUDING ALL ATTACHMENTS. REPLACE GUTTERS TO MATCH THE LOCATION, PROFILE AND DIMENSIONS OF THE EXISTING GUTTERS. REFER TO 4A/AD212.3 FOR TYPICAL IMAGE.
5	REMOVE EXISTING HARDWARE FROM REMOVED SCREEN DOOR. PATCH AND FILL HOLES. REFER TO 5A/AD212.3 FOR IMAGE.
6	REMOVE WOOD BATTEN TYPICAL OF INSTANCE OF LOOSE BATTEN. RETAIN BATTEN FOR REINSTALLATION. REFER TO 3B/AD212.3 FOR IMAGE.
7	REMOVE WOOD DETAIL. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 6A/AD212.3 FOR IMAGE.
8	REMOVE EXISTING RAILING IN ITS ENTIRETY INCLUDING BUT NOT LIMITED TO RAILS, POSTS AND BRACKETS.
9	NEATLY CUT OFF THE ROTTED ENDS OF THE BATTEN BOARD AND SIDING. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 1A/AD213.3 FOR IMAGE.
10	NEATLY CUT OFF THE ROTTED ENDS OF THE BATTEN BOARD AND SIDING. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 2A/AD213.3 FOR IMAGE.
11	REMOVE EXISTING SPRAY FOAM. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW FINISH. REFER TO 1B/AD213.3 FOR IMAGE.
12	REMOVE SATELLITE DISH AND ALL RELATED WIRES AND HARDWARE.
13	REMOVE BOARD AND BATTEN. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 3A/AD213.3 FOR IMAGE.
14	NEATLY CUT OFF THE ROTTED ENDS OF THE BATTEN BOARD AND SIDING. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 1B/AD213.3 FOR IMAGE.
16	REMOVE FASCIA. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 5A/AD213.3 FOR IMAGE.
17	REMOVE ROTTEN BRACKET. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 6A/AD213.3 FOR IMAGE.
18	REMOVE BATTEN BOARD. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 2B/AD213.3 FOR IMAGE.
19	CLEAN OUT WINDOW WELL AND REMOVE TOP WYTHE OF BRICK. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 5B/AD213.3 FOR IMAGE OF CONDITION.
20	REMOVE PLYWOOD. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 5C/AD213.3 FOR IMAGE.
21	REMOVE PLYWOOD AND GLASS. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 6A/AD213.3 FOR IMAGE OF CONDITION.
22	REMOVE INNER BOARD AND CLEAN OUT BEFORE REFASTENING. REFER TO 5C/AD213.3 FOR IMAGE OF CONDITION.
23	REMOVE BATTEN BOARD. PATCH AND REPAIR ALL EXISTING SURFACES AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 4A/AD213.3 FOR IMAGE.
24	REMOVE BOTTOM RAIL. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 1A/AD214.3 FOR IMAGE.
25	REMOVE EXISTING GLAZING FROM WINDOWS. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. TYPICAL. REFER TO 1B/AD214.3 FOR IMAGE.
26	REMOVE WOOD DETAILS. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 1C/AD214.3 FOR IMAGE.
27	REMOVE ROTTEN BRACKET. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 1D/AD214.3 FOR IMAGE.
28	REMOVE FLASHING. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 2A/AD214.3 FOR IMAGE.
29	REMOVE WOOD STAIRS AND LANDING IN THEIR ENTIRETY. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH.
30	REMOVE LOUVER. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH. REFER TO 2B/AD214.3 FOR IMAGE.

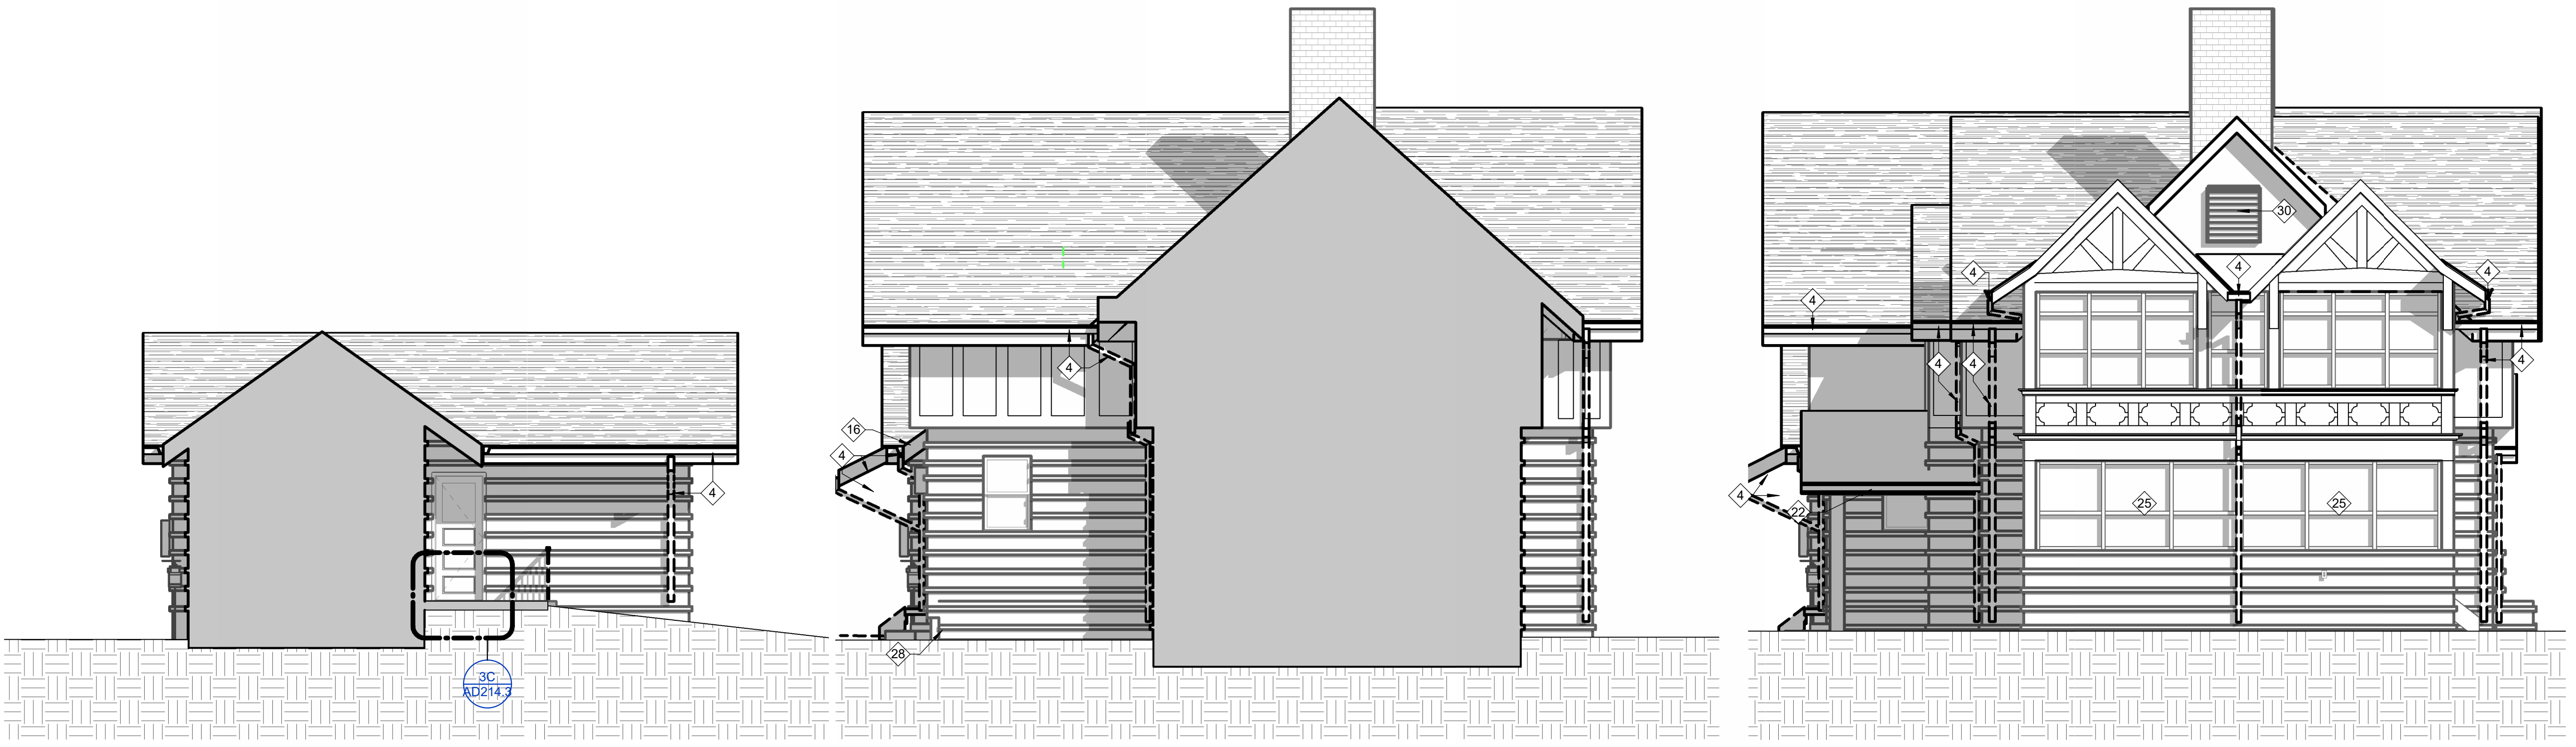

5B PARTIAL EXISTING EAST ELEVATION  
3/16" = 1'-0"

4B PARTIAL EXISTING EAST ELEVATION  
3/16" = 1'-0"

2B EXISTING EAST ELEVATION  
3/16" = 1'-0"

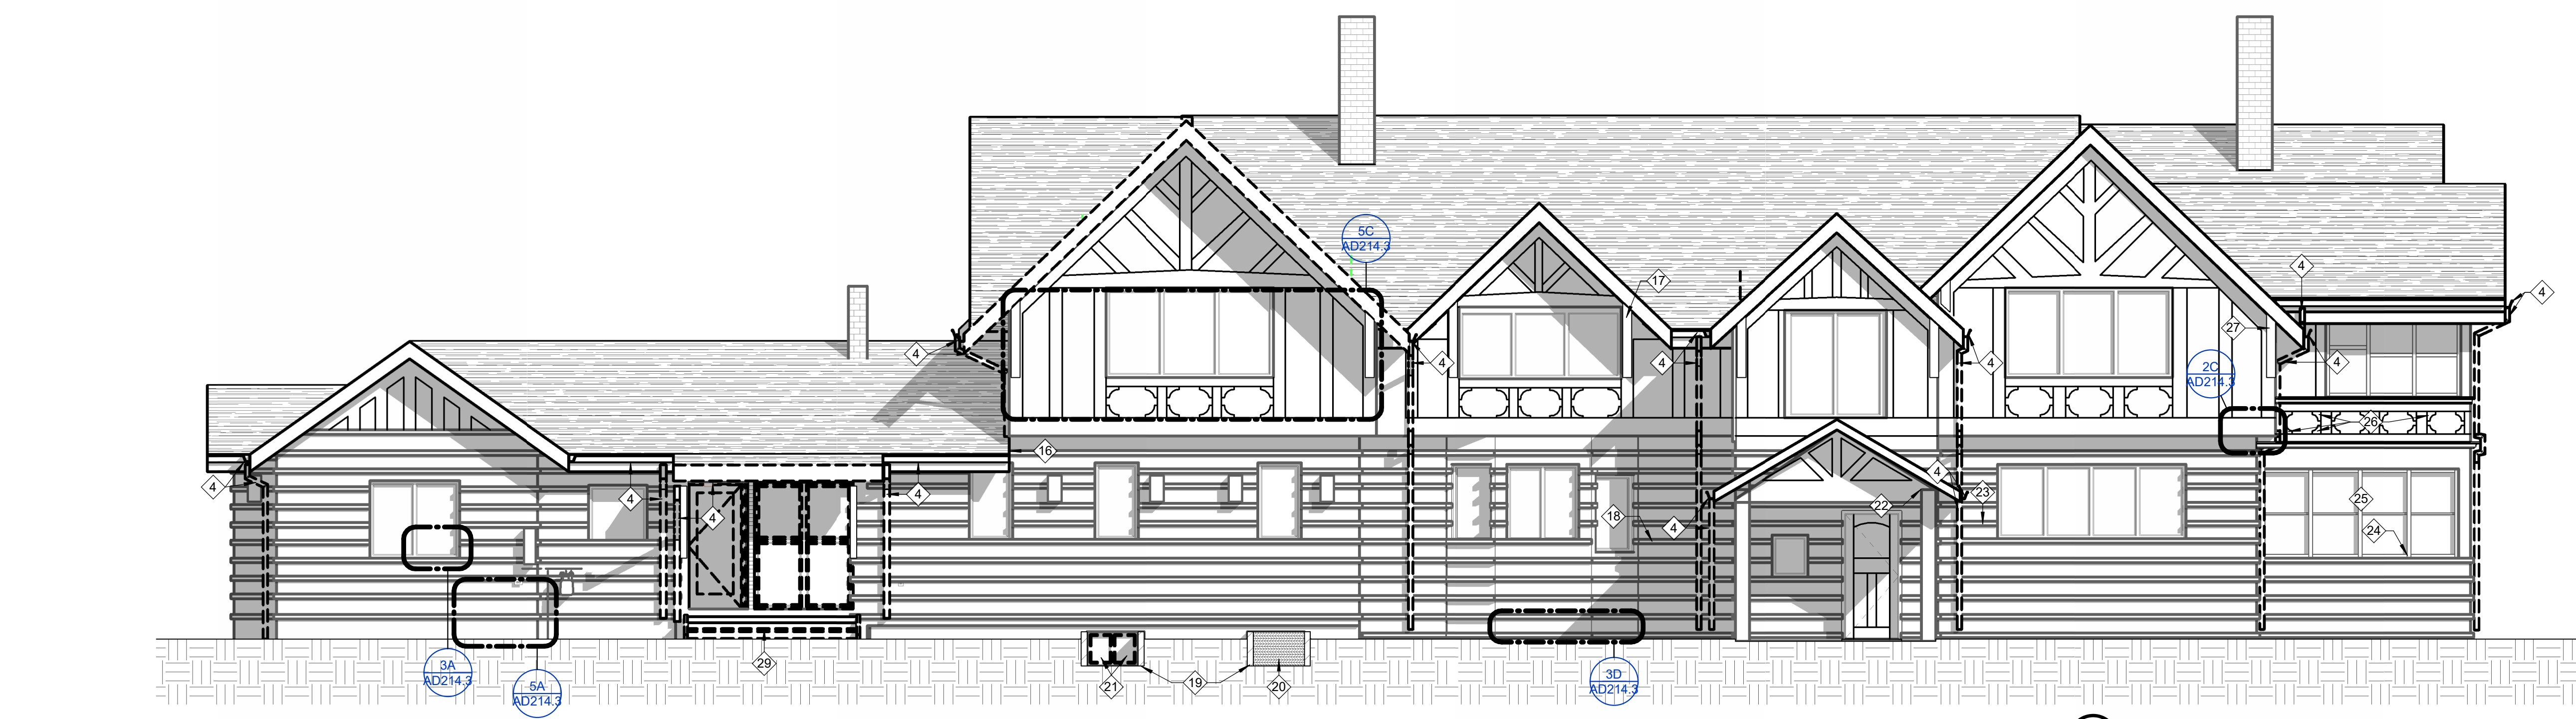

2A EXISTING SOUTH ELEVATION  
3/16" = 1'-0"

3705 IN SR 16  
 Brook, IN 47922

**NEWTON COUNTY BOARD OF COMMISSIONERS**

**HAZELDEN ESTATE RESTORATION - HOUSE RESTORATION - BID PACKAGE 3**

**SOUTH AND EAST DEMOLITION ELEVATIONS**  
**AD211.3**

THESE DRAWINGS ARE THE PROPERTY OF SCHMIDT ASSOCIATES. NO PART OF THESE DRAWINGS IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF SCHMIDT ASSOCIATES.

6

5

4

3

2

1

NOTE: DASHED LINE INDICATES AREA OF DEMOLITION WORK.



**SCHMIDT ASSOCIATES**  
 schmidt-arch.com • 317.263.6226  
 415 Massachusetts Ave., Indianapolis, IN 46204  
 731 Brent St. #203, Louisville, KY 40204

Project No. 2021-036.GAH  
 Project Date 01.08.2026  
 Produced MEW TM



*Sarah K. Hempstead*

These Drawings and Specifications, and all copies thereof are and shall remain the property and copyright of the Architect. They shall be used only with respect to this Project and are not to be used on any other Project or Work without prior written permission from the Architect.

#	Revision	Date

3705 IN SR 16  
 Brook, IN 47922

NEWTON COUNTY BOARD OF COMMISSIONERS

HAZELDEN ESTATE RESTORATION - HOUSE RESTORATION - BID PACKAGE 3

EXTERIOR DEMOLITION NOTES


AD212.3



REMOVE GUTTERS IN THEIR ENTIRETY INCLUDING ALL ATTACHMENTS. REPLACE GUTTERS TO MATCH THE LOCATION, PROFILE AND DIMENSIONS OF THE EXISTING GUTTERS.

REPLACE SPLITTING BRACKET. REPLICATE PROFILE, SIZE, AND DIMENSIONS OF THE EXISTING.

**5D** REFERENCE IMAGE  
 1 1/2" = 1'-0"

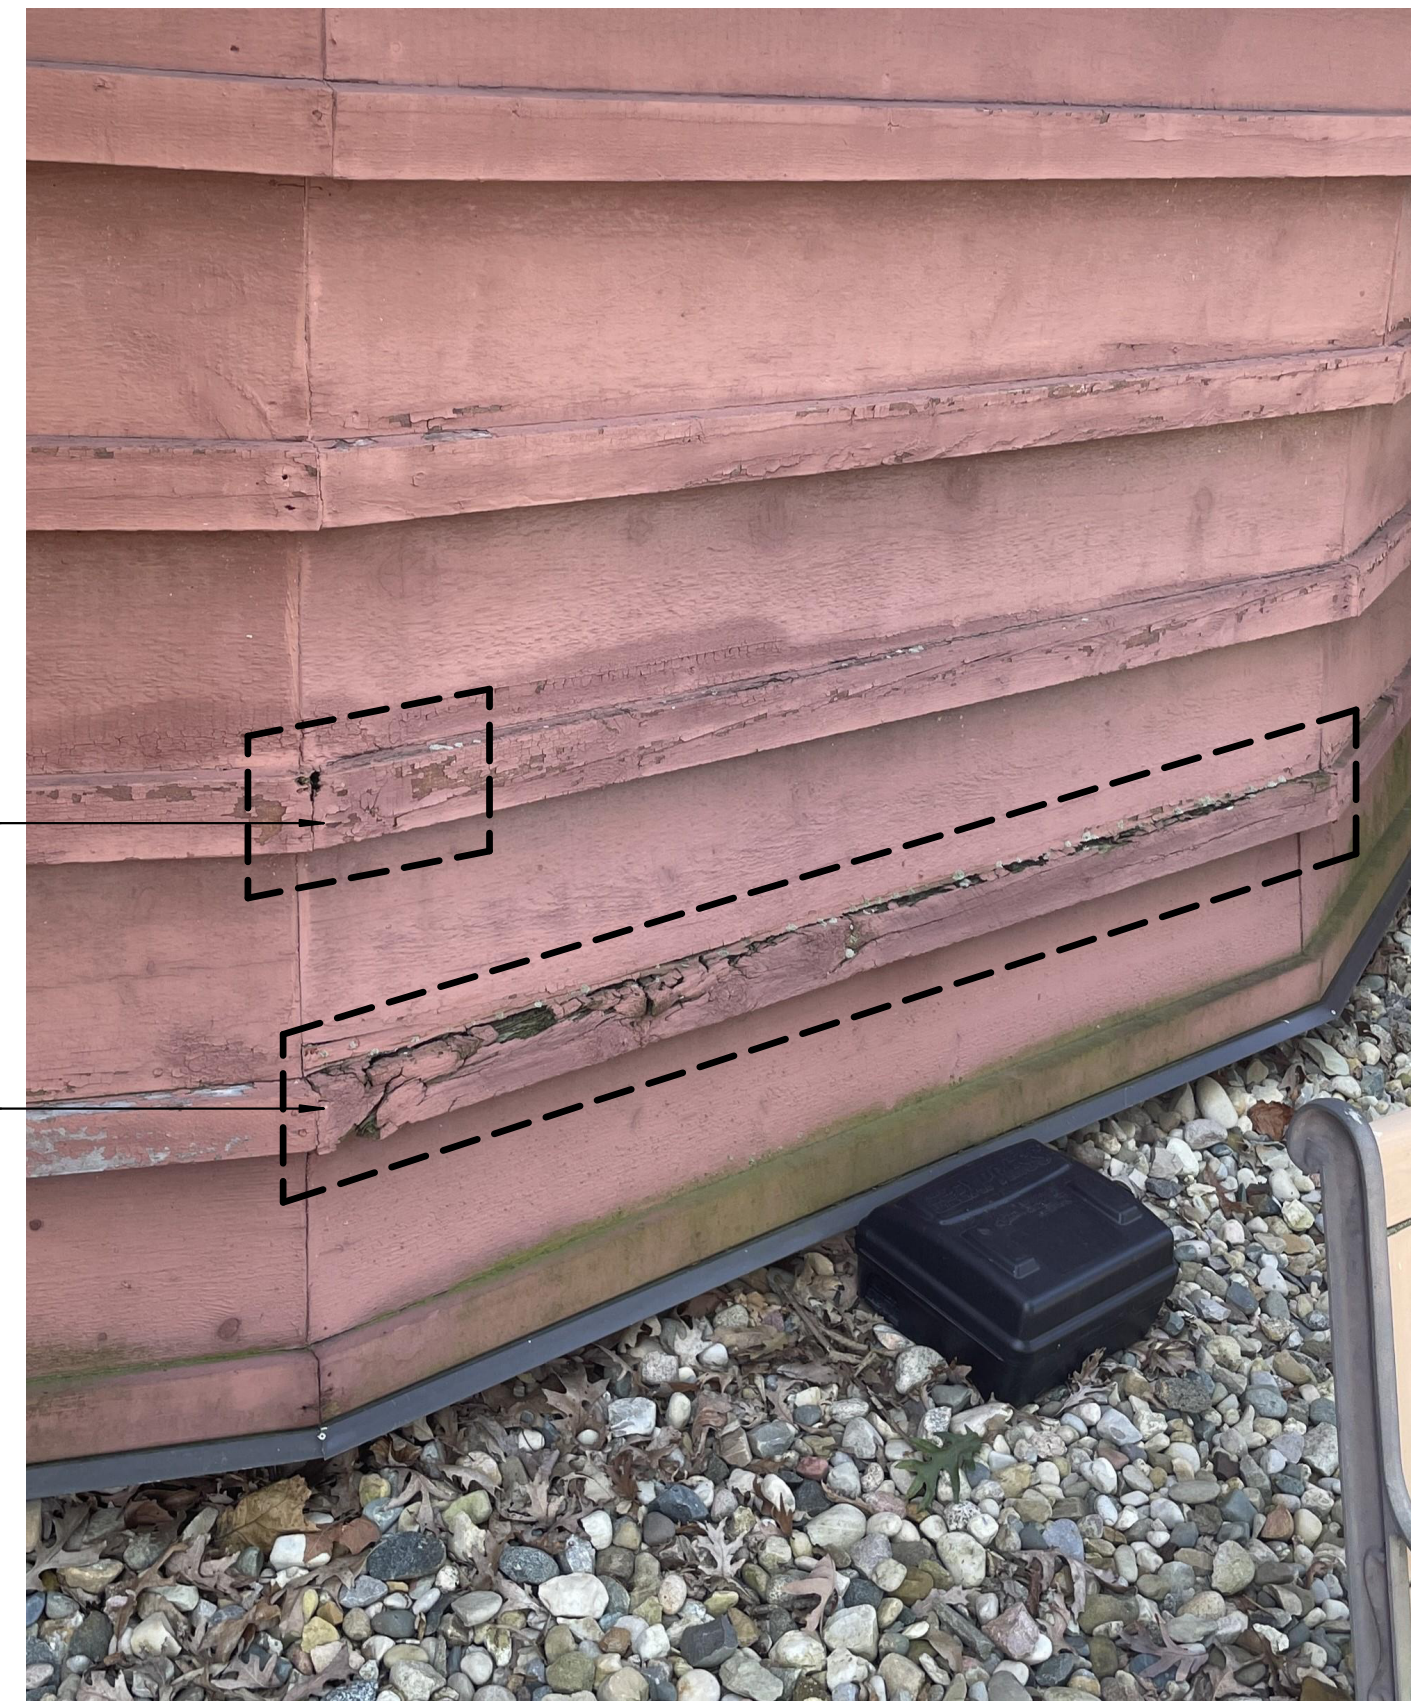

NEATLY CUT OFF THE ROTTED ENDS OF THE BATTEN BOARD. REPLACE WITH NEW WOOD AS REQUIRED TO RE-ESTABLISH THE SHAPE OF THE END OF THE BATTEN BOARD.

REMOVE WOOD BATTEN AND REPLACE WITH COMPONENT TO MATCH THE PROFILE, SIZE, AND DIMENSIONS OF THE EXISTING WOOD BATTEN

**3D** REFERENCE IMAGE  
 1 1/2" = 1'-0"



REMOVE WOOD BATTEN AND REPLACE WITH COMPONENT TO MATCH THE PROFILE, SIZE, AND DIMENSIONS OF THE EXISTING WOOD BATTEN

REMOVE WOOD BATTEN AND REPLACE WITH COMPONENT TO MATCH THE PROFILE, SIZE, AND DIMENSIONS OF THE EXISTING WOOD BATTEN

REINAIL GAPPING CORNERS. TYPICAL OF ALL GAPPING CORNERS

**1D** REFERENCE IMAGE  
 1 1/2" = 1'-0"



REMOVE WOOD DETAIL AND REPLACE WITH COMPONENT TO MATCH THE PROFILE, SIZE, AND DIMENSIONS OF THE EXISTING DETAIL.

REMOVE WOOD SIDING AND REPLACE WITH COMPONENT TO MATCH THE PROFILE, SIZE, AND DIMENSIONS OF THE EXISTING SIDING.

REMOVE WOOD BATTEN TYPICAL OF INSTANCE OF LOOSE BATTEN. RETAIN BATTEN FOR REINSTALLATION.

**5B** REFERENCE IMAGE  
 1 1/2" = 1'-0"



SEAL EXISTING ENTRANCE INTO BEE HIVE

REPLACE MOLDING UNDER SOFFIT

**3B** REFERENCE IMAGE  
 1 1/2" = 1'-0"



**1B** REFERENCE IMAGE  
 1 1/2" = 1'-0"



**6A** REFERENCE IMAGE  
 1 1/2" = 1'-0"




**5A** REFERENCE IMAGE  
 1 1/2" = 1'-0"



**4A** REFERENCE IMAGE  
 1 1/2" = 1'-0"



**3A** REFERENCE IMAGE  
 1 1/2" = 1'-0"

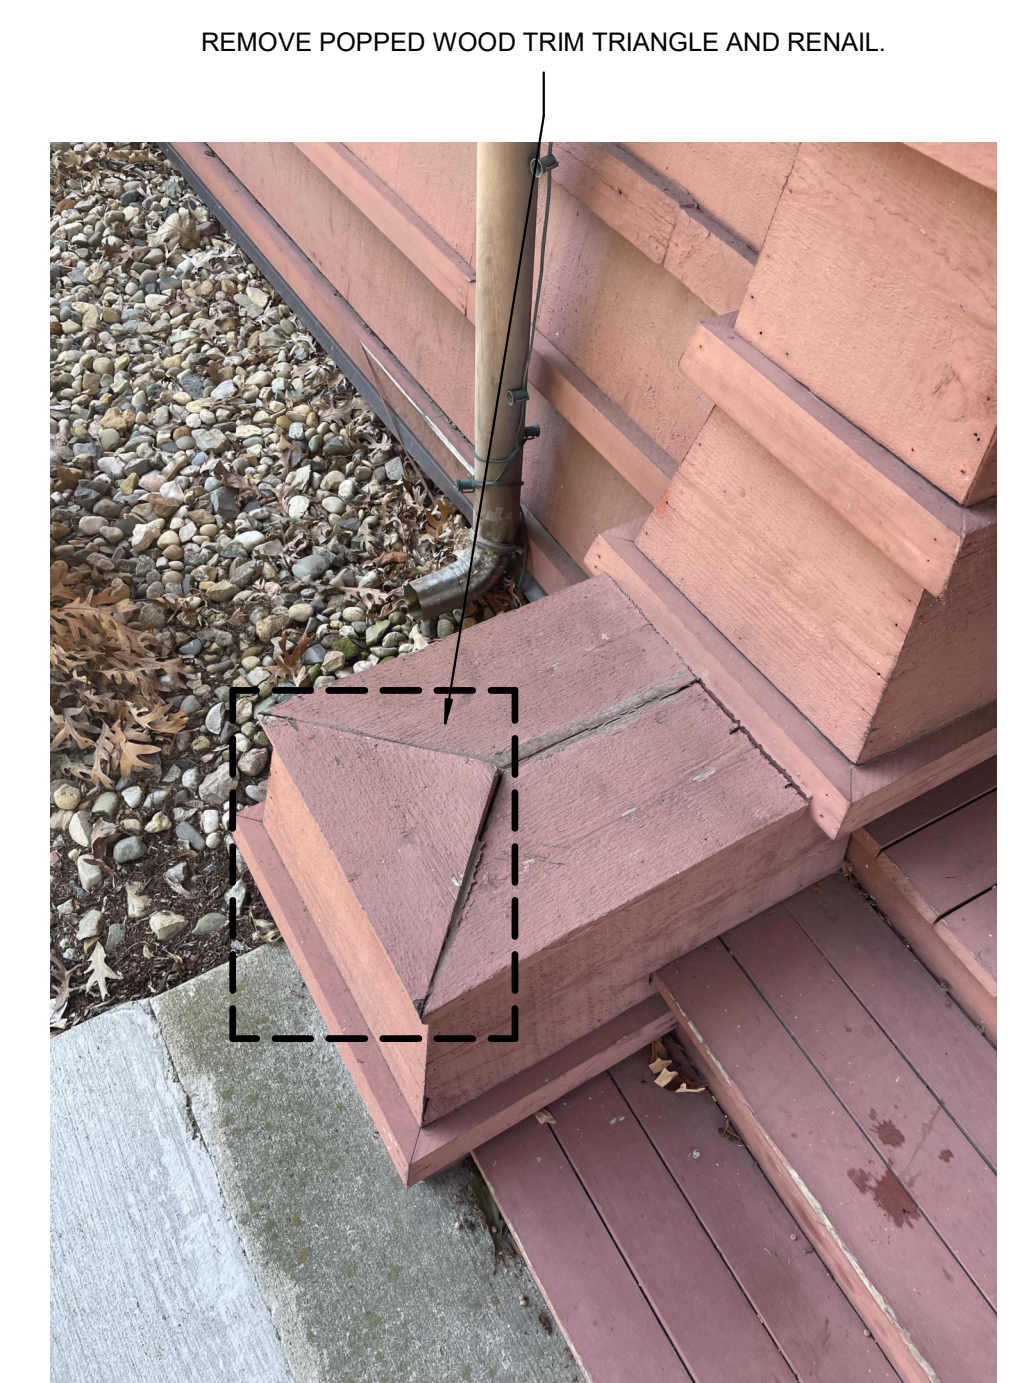

**2A** REFERENCE IMAGE  
 1 1/2" = 1'-0"



**1A** REFERENCE IMAGE  
 1 1/2" = 1'-0"

REMOVE WOOD DETAIL. PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH.

REMOVE EXISTING HARDWARE FROM REMOVED SCREEN DOOR. PATCH AND FILL HOLES.

REMOVE GUTTERS AND DOWNSPOUTS IN THEIR ENTIRETY INCLUDING ALL ATTACHMENTS. REPLACE GUTTERS TO MATCH THE LOCATION, PROFILE AND DIMENSIONS OF THE EXISTING GUTTERS.

REMOVE ROTTED PLANKS AND REPLACE WITH PLANKS SIMILAR TO NOTE 2A/AD212.3.

REMOVE POPPED WOOD TRIM TRIANGLE AND REINAIL.

REMOVE EXISTING STAIR TREADS AND REPAIR SIDING BOARD UNDER THRESHOLD. RETAIN STAIRTREADS FOR REINSTALLATION.


THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SCHMIDT ASSOCIATES. NO PART OF THESE DRAWINGS OR SPECIFICATIONS SHALL BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF SCHMIDT ASSOCIATES.

NOTE: DASHED LINE INDICATES AREA OF DEMOLITION WORK.



**SCHMIDT ASSOCIATES**  
 schmidt-arch.com • 317.263.6226  
 415 Massachusetts Ave., Indianapolis, IN 46204  
 731 Brent St. #203, Louisville, KY 40204

Project No. 2021-036.GAH  
 Project Date 01.08.2026  
 Produced MEW TM

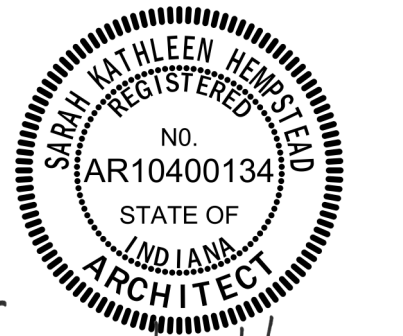

Sarah K. Hempstead

These Drawings and Specifications, and all copies thereof are and shall remain the property and copyright of the Architect. They shall be used only with respect to this Project and are not to be used on any other Project or Work without prior written permission from the Architect.

#	Revision	Date

3705 IN SR 16  
 Brook, IN 47922

NEWTON COUNTY BOARD OF COMMISSIONERS

HAZELDEN ESTATE RESTORATION - HOUSE RESTORATION - BID PACKAGE 3

EXTERIOR DEMOLITION NOTES

AD213.3



REPLACE WITH COMPONENTS TO MATCH THE PROFILE, SIZE, AND DIMENSIONS OF THE EXISTING.

REMOVE ALL WIRES AND ANCHORS AND REPAIR ANY AND ALL HOLES IN PLASTER OR WOOD.

REPLACE WARPED SIDING BOARD, REPLACE WITH COMPONENT TO MATCH THE PROFILE, SIZE, AND DIMENSIONS OF THE EXISTING BOARDS.

REPAIR CRACKING POSTS.

REMOVE INNER BOARD AND CLEAN OUT BEFORE REFASTENING. REFER TO 6C/AD213.3 FOR IMAGE OF CONDITION.

REMOVE PLYWOOD, PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH.

3D REFERENCE IMAGE  
 1 1/2" = 1'-0"

1 REFERENCE IMAGE  
 1 1/2" = 1'-0"

1D REFERENCE IMAGE  
 1 1/2" = 1'-0"



NEATLY CUT OFF THE ROTTED ENDS OF THE BATTEN BOARD AND SIDING, PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH.



6C REFERENCE IMAGE  
 1 1/2" = 1'-0"

5C REFERENCE IMAGE  
 1 1/2" = 1'-0"



6B REFERENCE IMAGE  
 1 1/2" = 1'-0"

5B REFERENCE IMAGE  
 1 1/2" = 1'-0"



6A REFERENCE IMAGE  
 1 1/2" = 1'-0"

5A REFERENCE IMAGE  
 1 1/2" = 1'-0"

REMOVE WOOD SIDING AND REPLACE WITH COMPONENT TO MATCH THE PROFILE, SIZE, AND DIMENSIONS OF THE EXISTING SIDING.



3B REFERENCE IMAGE  
 1 1/2" = 1'-0"

REMOVE BOARD AND BATTEN, PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH.



3A REFERENCE IMAGE  
 1 1/2" = 1'-0"



REMOVE EXISTING SPRAY FOAM, PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW FINISH.

1B REFERENCE IMAGE  
 1 1/2" = 1'-0"

NEATLY CUT OFF THE ROTTED ENDS OF THE BATTEN BOARD AND SIDING, PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH.



2A REFERENCE IMAGE  
 1 1/2" = 1'-0"

NEATLY CUT OFF THE ROTTED ENDS OF THE BATTEN BOARD AND SIDING, PATCH AND REPAIR ALL EXISTING SURFACES TO REMAIN AND PREP FOR NEW CONSTRUCTION/FINISH.



1A REFERENCE IMAGE  
 1 1/2" = 1'-0"

REMOVE BATTEN BOARD, PATCH AND REPAIR ALL EXISTING SURFACES AND PREP FOR NEW CONSTRUCTION/FINISH.



4A REFERENCE IMAGE  
 1 1/2" = 1'-0"

NOTES: 1. CONSULT THE ARCHITECT FOR ALL DEMOLITION AND RESTORATION REQUIREMENTS. 2. REFER TO THE EXISTING DRAWINGS FOR ALL DIMENSIONS AND FINISHES. 3. ALL DEMOLITION WORK SHALL BE DONE IN ACCORDANCE WITH THE CITY OF INDIANAPOLIS ORDINANCES. 4. ALL DEMOLITION WORK SHALL BE DONE IN ACCORDANCE WITH THE CITY OF INDIANAPOLIS ORDINANCES. 5. ALL DEMOLITION WORK SHALL BE DONE IN ACCORDANCE WITH THE CITY OF INDIANAPOLIS ORDINANCES. 6. ALL DEMOLITION WORK SHALL BE DONE IN ACCORDANCE WITH THE CITY OF INDIANAPOLIS ORDINANCES. 7. ALL DEMOLITION WORK SHALL BE DONE IN ACCORDANCE WITH THE CITY OF INDIANAPOLIS ORDINANCES. 8. ALL DEMOLITION WORK SHALL BE DONE IN ACCORDANCE WITH THE CITY OF INDIANAPOLIS ORDINANCES. 9. ALL DEMOLITION WORK SHALL BE DONE IN ACCORDANCE WITH THE CITY OF INDIANAPOLIS ORDINANCES. 10. ALL DEMOLITION WORK SHALL BE DONE IN ACCORDANCE WITH THE CITY OF INDIANAPOLIS ORDINANCES.